

Type ST4

FEATURES

Rubber bellow mechanical seal, unbalanced, direction of rotation independent, for heavy duty.

APPLICATION

Water and wastewater pumps, multistage pumps, submersible motors and pumps.

OPERATING LIMITS

P = 12 bar


V = 15 m/s

T = -20 ÷ 140°C



MATERIALS (EN 12756)

ID	DESCRIPTION	MATERIALS			
		A	B	Q	
1	Seal face	A	B	Q	
2	Seat	V	Q		
3	Elastomer	P	E	V	
4	Spring	F	G		
5	Other metal parts	F	G		

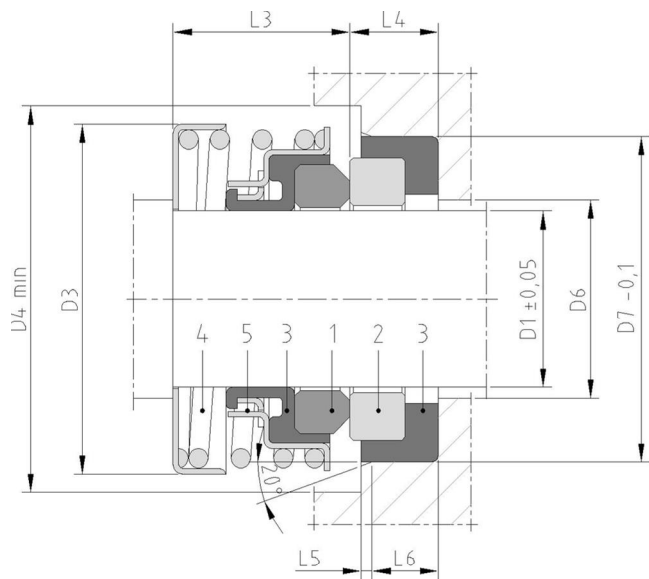

D1	D3	D4	D6	D7	L1	L3	L4	L5	L6
15	32	35	17	29,5	21	13+0,5	8	1	6
16	32	35	17	29,5	21	13+0,5	8	1	6
16 *	32	35	17	29,5	24,3	16,3±0,5	8	1	6

* suitable for 4" submersible motors